
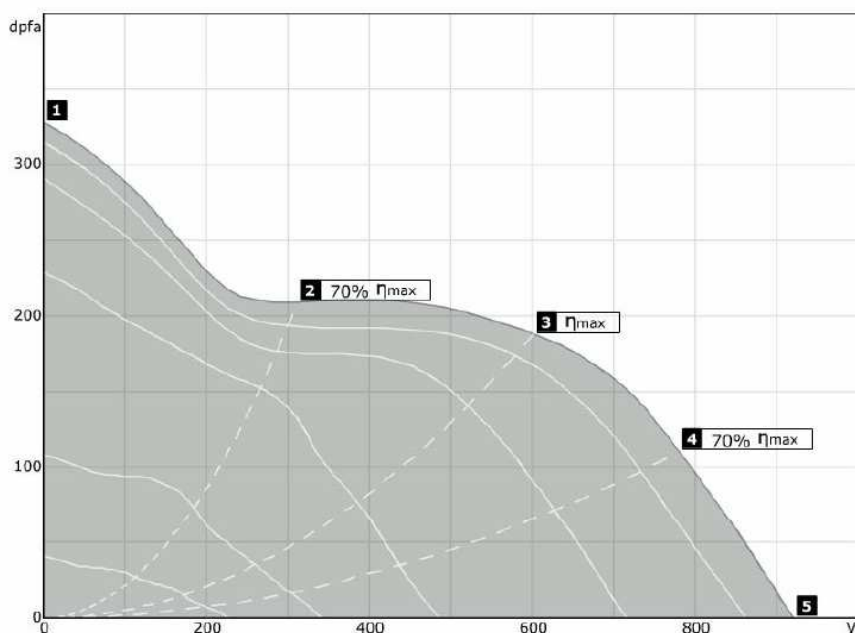
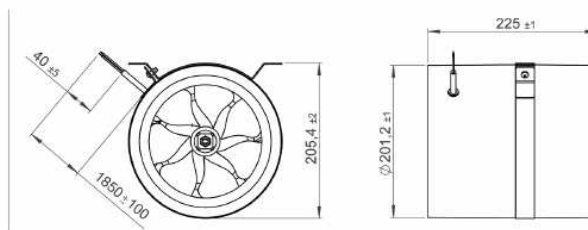




- ventilator diagonal cu stator
- carcasa de plastic
- turatie reglabila
- termocontact integrat
- Include consola de montaj

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	0,36	0,35	0,42	0,45	0,46
consum de putere	P ₁ W	80	75	90	100	105
turatie	n 1/min	2850	2870	2780	2740	2720
put. fonica aspiratie	L _{WA5} dB (A)	-	72	71	70	72
put. fonica refulare	L _{WA6} dB (A)	-	76	75	74	76
put. fonica radiatie	L _{WA2} dB (A)	-	60	59	58	57
tensiunea	U _N	230V ~		reglaj turatie	V	
curent	I _N	0,5 A		protectie motor	TMI	
curent	I _{max}	0,5 A		condensator	3,5 μF / 450 V	
temperatura ambianta	t _U	45 °C		clasa de izolare	F	
temperatura medie	t _F	45 °C		numarul de poli	2	
				greutate	2,9 kg	


accesorii pentru EL 200 E2 01
 pentru mai multe informatii vezi internet


TEE 015
transformator in 5 trepte
fara protectie motor



TES 0145
transformator 7 trepte
fara protectie motor



GS 01
comutator



VM 200
manseta de legatura
pentru reducerea zgomotului si vibratiilor



RSK 200
clapeta anti-retur



RSK 200D
clapeta anti-retur
cu izolare



SG 200 02
grilaj de protectie



SDS 200
atenuator de zgomot rigid



SDF 200
atenuator de zgomot flexibil



FV 200
cutie filtranta cu filtru material G3



FT 200
cutie filtranta pentru filtru cu buzunari
fara filtru



FTW 200
cutie filtranta pt. filtru cu buzunari
contine baterie de incalzire cu apa