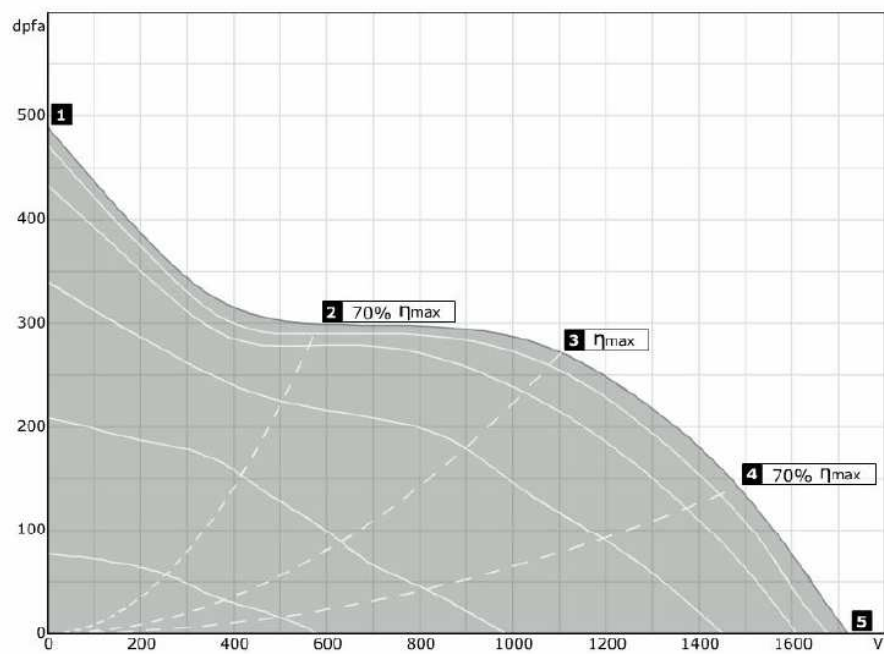


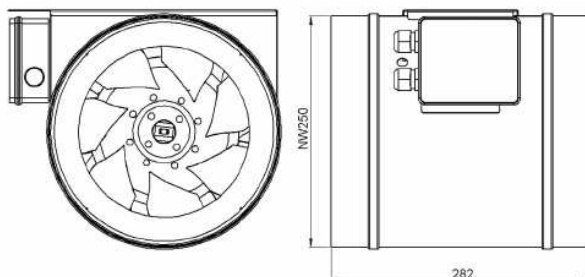
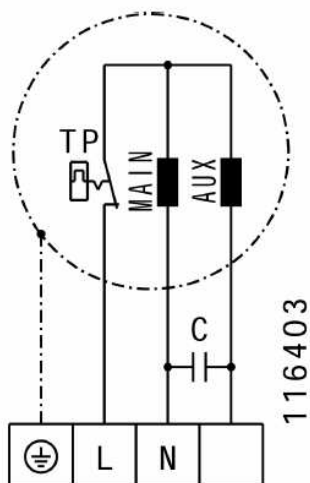


- ventilator diagonal cu stator
- carcasa metalica tabla zincata
- turatie reglabila
- termocontact integrat
- Include consola de montaj

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	0,75	0,65	0,77	0,78	0,73
consum de putere	P ₁ W	170	145	180	180	170
turatie	n 1/min	2820	2870	2810	2840	2890
put. fonica aspiratie	L _{WA5} dB (A)	-	74	71	72	75
put. fonica refulare	L _{WA6} dB (A)	-	78	75	77	79
put. fonica radiatie	L _{WA2} dB (A)	-	57	52	53	55

tensiunea	U _N	230V ~	reglaj turatie	V
curent	I _N	0,8 A	protectie motor	TMI
curent	I _{max}	1,0 A	condensator	6 μF / 400 V
temperatura ambianta	t _U	55 °C	clasa de izolare	F
temperatura medie	t _F	55 °C	numarul de poli	2
			greutate	6,35 kg


accesorii pentru EL 250 E2 01
 pentru mai multe informatii vezi internet


TEE 015
transformator in 5 trepte
fara protectie motor



TES 0145
transformator 7 trepte
fara protectie motor



GS 01
comutator



VM 250
manseta de legatura
pentru reducerea zgomotului si vibratiilor



RSK 250
clapeta anti-retur



RSK 250D
clapeta anti-retur
cu izolare



SG 250 01
grilaj de protectie



SG 250 02
grilaj de protectie



SDS 250
atenuator de zgomot rigid



SDF 250
atenuator de zgomot flexibil



FV 250
cutie filtranta cu filtru material G3



FT 250
cutie filtranta pentru filtru cu buzu
fara filtru