


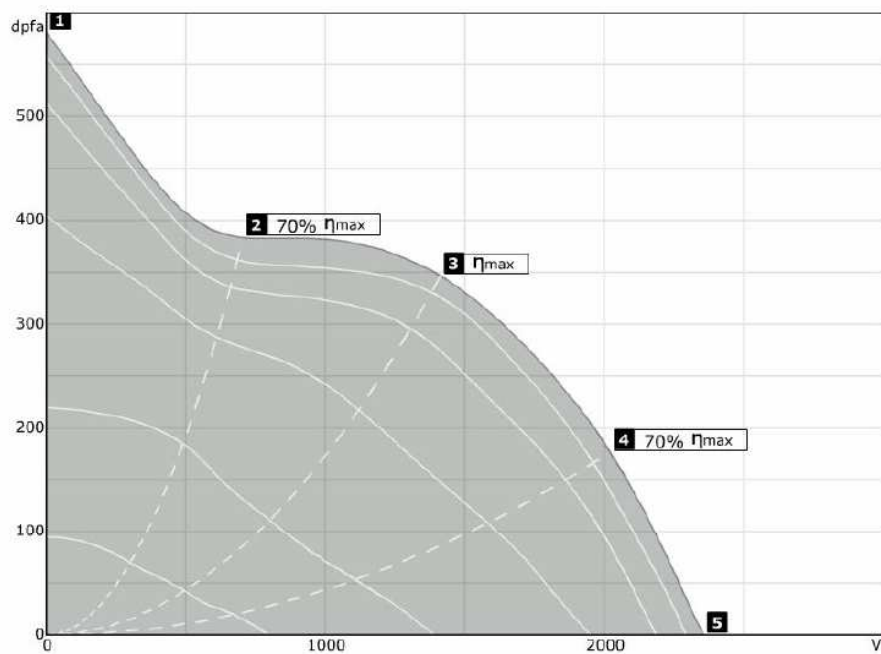

- ventilator diagonal cu stator
- carcasa metalica tabla zincata
- turatie reglabila
- termocontact integrat
- Include consola de montaj

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	1,08	0,91	1,15	1,20	1,11
consum de putere	P _i W	240	210	260	270	250
turatie	n 1/min	2840	2880	2820	2820	2840
put. fonica aspiratie	L _{WA5} dB (A)	-	78	76	76	79
put. fonica refulare	L _{WA6} dB (A)	-	82	82	80	82
put. fonica radiatie	L _{WA2} dB (A)	-	63	62	56	58

tensiunea	U _N	230V ~	reglaj turatie	V
curent	I _N	1,2 A	protectie motor	TMI
curent	I _{max}	1,6 A	condensator	8 μF / 450 V
temperatura ambianta	t _U	55 °C	clasa de izolare	F
temperatura medie	t _F	55 °C	numarul de poli	2
			greutate	8,3 kg

accesorii pentru EL 280 E2 02
 pentru mai multe informatii vezi internet


TEM 035
transformator in 5 trepte
cu protectie motor



TES 035
transformator 7 trepte
fara protectie motor



GS 01
comutator



VM 280
manseta de legatura
pentru reducerea zgomotului si vibratiilor



SG 280 02
grilaj de protectie



SDS 280
atenuator de zgomot rigid



UKR 5030 02
placa adaptor
canal rectangular/tribulatura circulara

