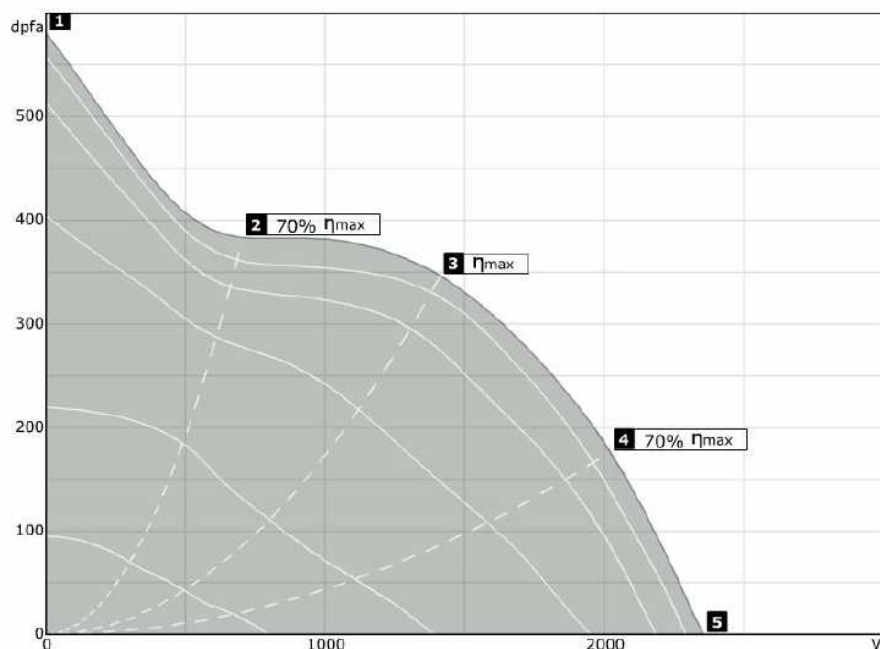




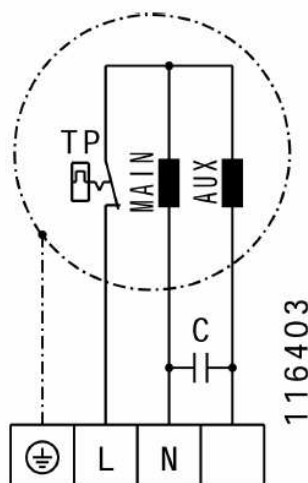


- ventilator diagonal cu stator
- carcasa metalica tabla zincata
- turatie reglabila
- termocontact integrat
- Include consola de montaj

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	1,08	0,91	1,15	1,20	1,11
consum de putere	P ₁ W	240	210	260	270	250
turatie	n 1/min	2840	2880	2820	2820	2840
put. fonica aspiratie	L _{WA5} dB (A)	-	78	76	76	79
put. fonica refulare	L _{WA6} dB (A)	-	82	82	80	82
put. fonica radiatie	L _{WA2} dB (A)	-	63	62	56	58

tensiunea	U _N	230V ~	reglaj turatie	V
curent	I _N	1.2 A	protectie motor	TMI
curent	I _{max}	1.6 A	condensator	8 μF / 450 V
temperatura ambianta	t _U	55 °C	clasa de izolare	F
temperatura medie	t _F	55 °C	numarul de poli	2
			greutate	8,35 kg


accesorii pentru EL 315 E2 03
 pentru mai multe informatii vezi internet

-  **TEM 035**
transformator in 5 trepte
cu protectie motor
-  **TES 035**
transformator 7 trepte
fara protectie motor
-  **GS 01**
comutator
-  **VM 315**
manseta de legatura
pentru reducerea zgomotului si vibratiilor
-  **RSK 315**
clapeta anti-retur
-  **RSK 315D**
clapeta anti-retur
cu izolatie
-  **SG 315 01**
grilaj de protectie
-  **SG 315 02**
grilaj de protectie
-  **SDS 315**
atenuator de zgomot rigid
-  **SDF 315**
atenuator de zgomot flexibil
-  **FV 315**
cutie filtranta cu filtru material G3
-  **FT 315**
cutie filtranta pentru filtru cu buzu
fara filtru