


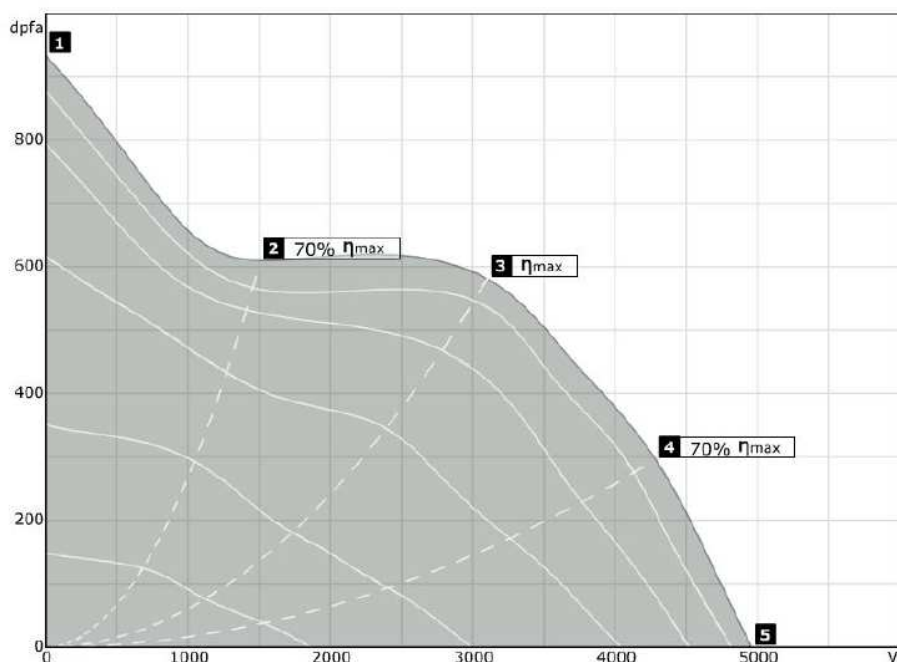

- ventilator diagonal cu stator
- carcasa metalica tabla zincata
- turatie reglabila
- termocontact integrat
- Include consola de montaj

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	3,71	3,04	4,18	4,21	3,76
consum de putere	P ₁ W	840	690	950	950	860
turatie	n 1/min	2800	2850	2810	2760	2810
put. fonica aspiratie	L _{WA5} dB (A)	-	82	79	80	84
put. fonica refulare	L _{WA6} dB (A)	-	84	84	85	87
put. fonica radiatie	L _{WA2} dB (A)	-	64	63	64	49

tensiunea	U _N	230V ~	reglaj turatie	V
curent	I _N	4,3 A	protectie motor	TMO
curent	I _{max}	5,4 A	condensator	22 μF / 400 V
temperatura ambianta	t _U	45 °C	clasa de izolare	F
temperatura medie	t _F	45 °C	numarul de poli	2
			greutate	17,3 kg

accesorii pentru EL 355 E2 01

pentru mai multe informatii vezi internet

- TEM 075 transformator in 5 trepte cu protectie motor
- TES 075 transformator 7 trepte fara protectie motor
- GS 01 comutator
- VM 355 manseta de legatura pentru reducerea zgomotului si vibratiilor
- RSK 355 clapeta anti- retur
- RSK 355D clapeta anti- retur cu izolare
- SG 355 02 grilaj de protectie
- SDS 355 atenuator de zgomot rigid
- SDF 355 atenuator de zgomot flexibil
- FV 355 cutie filtranta cu filtru material G3
- FT 355 cutie filtranta pentru filtru cu buzu fara filtru
- FTW 355 cutie filtranta pt. filtru cu buzunari contine baterie de incalzire cu apa

