


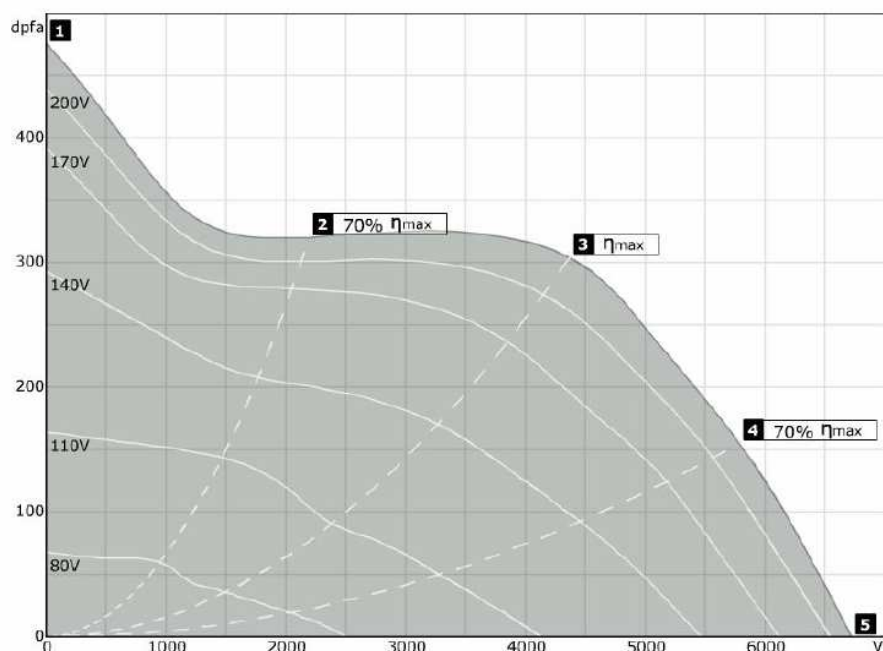

- ventilator diagonal cu stator
- carcasa din aluminiu
- turatie reglabila
- termocontact integrat
- Include consola de montaj

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	2.98	2.64	3.22	3.07	2.83
consum de putere	P ₁ W	650	570	710	680	620
turatie	n 1/min	1350	1380	1340	1360	1380
put. fonica aspiratie	L _{WA5} dB (A)	-	79	75	77	79
put. fonica refulare	L _{WA6} dB (A)	-	82	83	83	83
put. fonica radiatie	L _{WA2} dB (A)	-	79	78	76	78

tensiunea	U _N	230V ~	reglaj turatie	V
curent	I _N	3.2 A	protectie motor	TAO
curent	I _{max}	3.7 A	condensator	16 μF / 420 V
temperatura ambianta	t _U	80 °C	clasa de izolare	F
temperatura medie	t _F	80 °C	numarul de poli	4
			greutate	23,2 kg

accesorii pentru EL 500 E4 01

pentru mai multe informatii vezi internet

- GS 03 comutator
- TEM 050 transformator in 5 trepte cu protectie motor
- TES 050 transformator 7 trepte fara protectie motor
- VM 500 manseta de legatura pentru reducerea zgomotului si vibratiilor
- SDS 500 atenuator de zgomot rigid

