


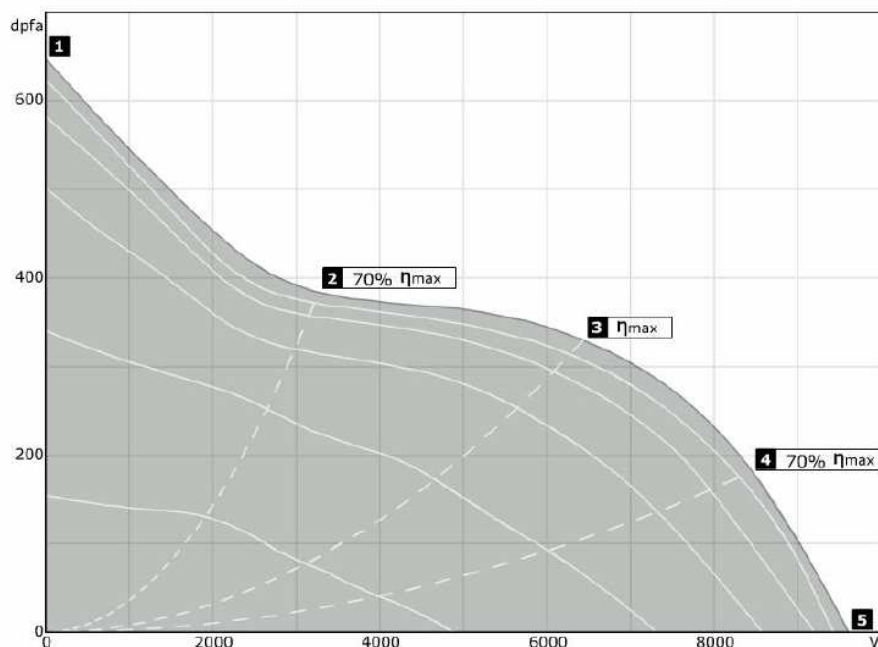

- ventilator diagonal cu stator
- carcasa din aluminiu
- turatie reglabila
- termocontact integrat
- Include consola de montaj

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	4.90	4.17	4.90	5.14	4.76
consum de putere	P ₁ W	1090	940	1120	1160	1090
turatie	n 1/min	1410	1430	1420	1410	1420
put. fonica aspiratie	L _{WA5} dB (A)	-	87	86	86	91
put. fonica refulare	L _{WA6} dB (A)	-	94	90	93	93
put. fonica radiatie	L _{WA2} dB (A)	-	-	-	-	-

tensiunea	U _N	230V ~	reglaj turatie	V
curent	I _N	5.2 A	protectie motor	TAO
curent	I _{max}	6.7 A	condensator	40 μF / 400 V
temperatura ambianta	t _U	80 °C	clasa de izolare	F
temperatura medie	t _F	80 °C	numarul de poli	4
			greutate	40 kg

accesorii pentru EL 560 E4 01
 pentru mai multe informatii vezi internet

 GS 03
 comutator

 TEM 075
 transformator in 5 trepte
 cu protectie motor

 TES 075
 transformator 7 trepte
 fara protectie motor

 VM 560
 manseta de legatura
 pentru reducerea zgomotului si vibratiilor
