


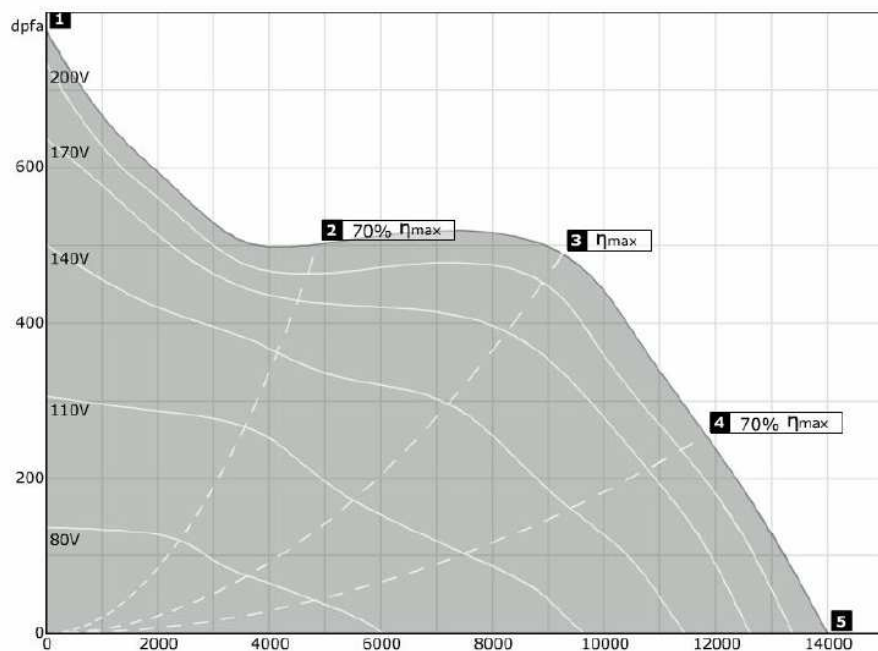

- ventilator diagonal cu stator
- carcasa din aluminiu
- turatie reglabila
- termocontact integrat
- Include consola de montaj

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	8,88	7,63	9,64	9,25	8,47
consum de putere	P _i W	1940	1670	2140	2050	1860
turatie	n 1/min	1370	1410	1370	1380	1400
put. fonica aspiratie	L _{WA5} dB (A)	-	92	87	90	92
put. fonica refulare	L _{WA6} dB (A)	-	96	95	96	96
put. fonica radiatie	L _{WA2} dB (A)	-	-	-	-	-

tensiunea	U _N	230V ~	reglaj turatie	V
curent	I _N	9,6 A	protectie motor	TAO
curent	I _{max}	11,4 A	condensator	60 μF / 400 V
temperatura ambianta	t _U	50 °C	clasa de izolare	F
temperatura medie	t _F	50 °C	numarul de poli	4
			greutate	43,1 kg

accesorii pentru EL 630 E4 01
 pentru mai multe informatii vezi internet

 GS 01
 comutator

 TEM 130
 transformator in 5 trepte
 cu protectie motor

 TES 130
 transformator 7 trepte
 fara protectie motor

 VM 630
 manseta de legatura
 pentru reducerea zgomotului si vibratiilor
