
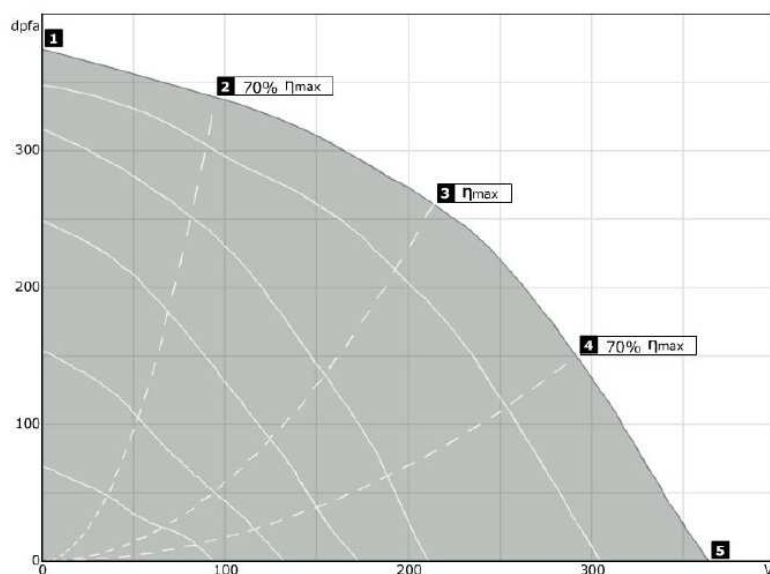



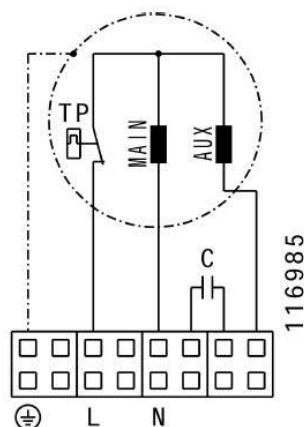

- ventilator centrifugal cu palete orientate inainte
- carcasa metalica tabla zincata
- turatie reglabila
- termocontact integrat
- izolat fonic

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	0.32	0.34	0.40	0.44	0.48
consum de putere	P ₁ W	70	75	90	100	110
turatie	n 1/min	2700	2610	2310	2030	1760
put. fonica aspiratie	L _{WA5} dB (A)	-	-	51	50	50
put. fonica refulare	L _{WA6} dB (A)	-	-	66	64	64
put. fonica radiatie	L _{WA2} dB (A)	-	-	49	46	16
Tensiunea	U _N	230V ~		reglaj turatie		V
curent	I _N	0.5 A		protectie motor		TAI
curent	I _{max}	0.5 A		condensator		2 µF / 450 V
temperatura ambianta	t _U	50 °C		clasa de izolare		B
temperatura medie	t _F	50 °C		numarul de poli		2
				greutate		10,8 kg


accesorii pentru ISOT 125 E2 11
 pentru mai multe informatii vezi internet

- 
MTY 1
regulator electronic continuu
- 
ETY 15
regulator electronic continuu
- 
TEE 015
transformator in 5 trepte fara protectie motor
- 
TES 0145
transformator 7 trepte fara protectie motor
- 
GS 01
comutator
- 
VM 125
manseta de legatura pentru reducerea zgomotului si vibratiilor
- 
RSK 125
clapeta anti- retur
- 
RSK 125D
clapeta anti- retur cu izolatie
- 
SG 125 01
grilaj de protectie
- 
SDS 125
atenuator de zgomot rigid
- 
SDF 125
atenuator de zgomot flexibil
- 
FV 125
cutie filtranta cu filtru material G3