


- ventilator centrifugal cu palete orientate inainte
- carcasa metalica tabla zincata
- turatie reglabila
- termocontact integrat
- izolat fonic

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	0.45	0.49	0.57	0.68	0.73
consum de putere	P ₁ W	100	110	130	150	170
turatie	n 1/min	2730	2640	2430	2010	1690
put. fonica aspiratie	L _{WA5} dB (A)	-	59	58	55	56
put. fonica refulare	L _{WA0} dB (A)	-	71	71	70	70
put. fonica radiatie	L _{WA2} dB (A)	-	54	54	51	48
Tensiunea	U _N	230V ~	reglaj turatie		V	
curent	I _N	0.7 A	protectie motor		TAI	
curent	I _{max}	0.7 A	condensator		4 μF / 450 V	
temperatura ambianta	t _U	60 °C	clasa de izolare		F	
temperatura medie	t _F	60 °C	numarul de poli		2	
		greutate		12,5 kg		

accesorii pentru ISOT 200 E2 10
 pentru mai multe informatii vezi internet

- MTY 1 regulator electronic continuu
- ETY 15 regulator electronic continuu
- TEE 015 transformator in 5 trepte fara protectie motor
- TES 0145 transformator 7 trepte fara protectie motor
- GS 01 comutator
- VM 200 manseta de legatura pentru reducerea zgomotului si vibratiilor
- RSK 200 clapeta anti-retur
- RSK 200D clapeta anti-retur cu izolatie
- SG 200 01 grilaj de protectie
- SDS 200 atenuator de zgomot rigid
- SDF 200 atenuator de zgomot flexibil
- FV 200 cutie filtranta cu filtru material G3

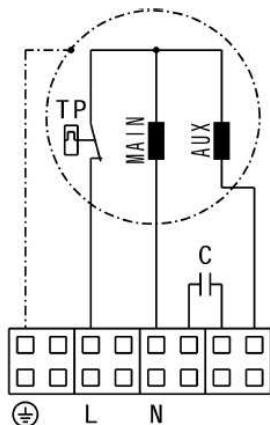

116985

