
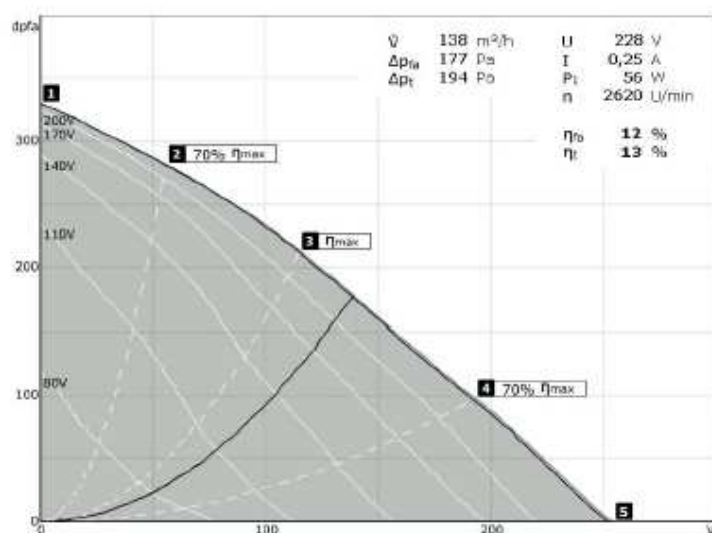




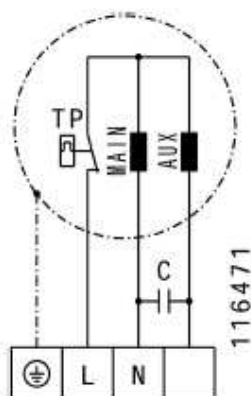

- ventilator centrifugal cu palete orientate inapoi
- carcasa metal RAL 7035
- turatie reglabila
- termocontact integrat

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	0,23	0,23	0,25	0,27	0,28
consum de putere	P_t W	48	50	55	60	60
turatie	n 1/min	2820	2780	2670	2530	2470
put. fonica aspiratie	L_{NAAS} dB (A)	-	-	64	65	66
put. fonica refulare	L_{NAB} dB (A)	-	-	64	65	66
put. fonica radiatie	L_{NAR} dB (A)	-	-	47	47	48
Tensiunea	U_N	230V ~		reglaj turatie		V
curent	I_N	0,3 A		protectie motor		TAI
curent	I_{max}	0,3 A		condensator		2 μF / 400 V
temperatura ambianta	t_a	80 °C		clasa de izolare		F
temperatura medie	t_p	80 °C		numarul de poli		2
				greutate		2,72 kg


accesorii pentru RS 100L
 pentru mai multe informatii vizitati internet

- MTY 1
regulator electronic
continuu
- ETY 15
regulator electronic
continuu
- TEE 015
transformator in 5 trepte
fara protectie motor
- TES 0145
transformator 7 trepte
fara protectie motor
- GS 01
comutator
- MRS 1
consola de montaj
pentru ventilatoare pt tubulatura R0
- VM 100
maneta de legatura
pentru reducerea zgomotului si vibratiilor
- RSK 100
clapeta anti-retur
- RSK 100D
clapeta anti-retur
cu izolare
- SG 100 01
grilaj de protectie
- SDS 100
atenuator de zgomot rigid
- SDF 100
atenuator de zgomot flexibil