

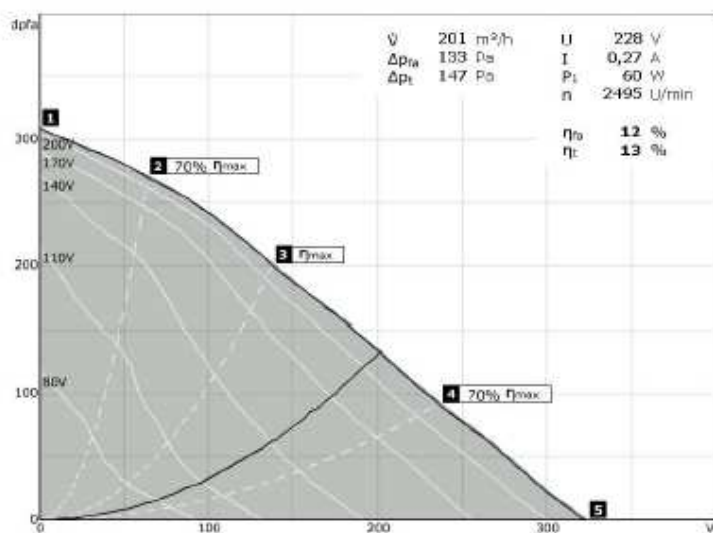


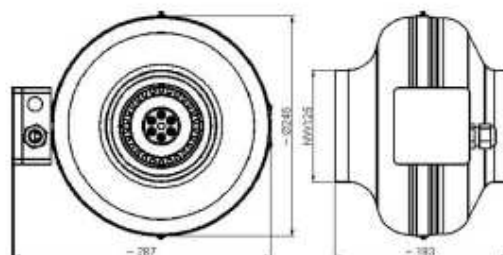

- ventilator centrifugal cu palete orientate inapoi
- carcasa metal RAL 7035
- turatie reglabila
- termocontact integrat

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	0.23	0.23	0.25	0.28	0.29
consum de putere	P_t W	48	50	55	60	65
turatie	n 1/min	2620	2750	2610	2440	2360
put. fonica aspiratie	L_{wAS} dB (A)	-	-	65	66	68
put. fonica refulare	L_{wRS} dB (A)	-	-	65	65	67
put. fonica radiatie	L_{wAS} dB (A)	-	-	44	44	45
Tensiunea	U_n	230V ~		reglaj turatie	V	
curent	I_n	0,3 A		protectie motor	TAI	
curent	I_{max}	0,3 A		condensator	2 μ F / 400 V	
temperatura ambianta	t_a	80 °C		clasa de izolare	F	
temperatura medie	t_m	80 °C		numarul de poli	2	
				greutate	2,62 kg	

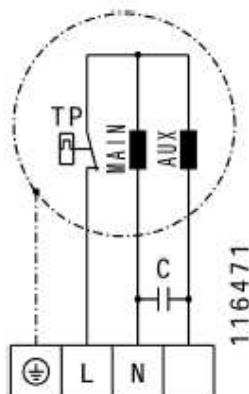

accesorii pentru RS 125L

pentru mai multe informatii vizitati internet


 MTY 1
 regulator electronic
 continuu

 ETY 15
 regulator electronic
 continuu

 TEE 015
 transformator in 5 trepte
 fara protectie motor

 TES 0145
 transformator 7 trepte
 fara protectie motor

 GS 01
 comutator

 MRS 1
 consola de montaj
 pentru ventilator si tubulatura RS

 VM 125
 manseta de legatura
 pentru reducerea zgomotului si vibratiilor

 RSK 125
 clapeta anti-etur

 RSK 125D
 clapeta anti-etur
 cu bobine

 SG 125 01
 grilaj de protectie

 SDS 125
 atenuator de zgomot rigid

 SDF 125
 atenuator de zgomot flexibil