

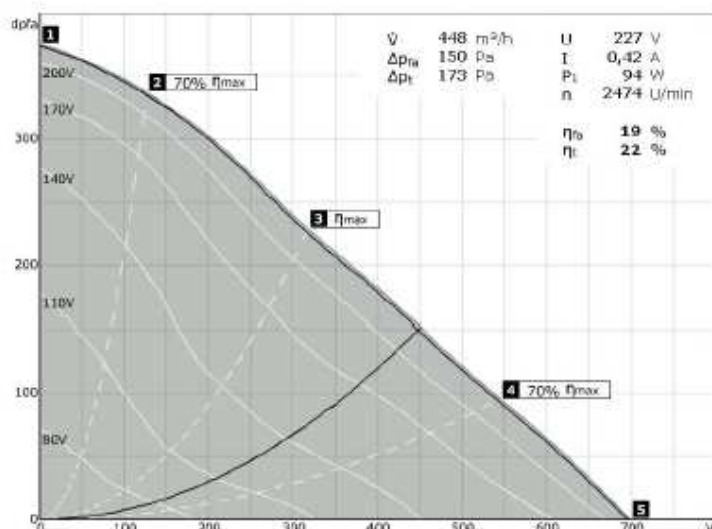


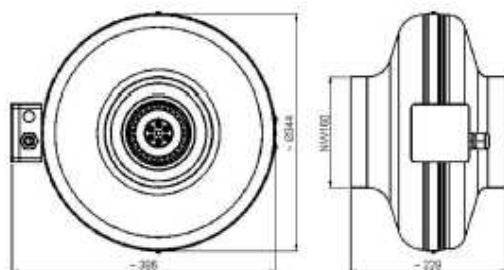

- ventilator centrifugal cu palete orientate inapoi
- carcasa metal RAL 7035
- turatie reglabila
- termosta contact integrat

230V 50Hz

punct de functionare		1	2	3	4	5
curent	I A	0.34	0.36	0.41	0.43	0.41
consum de putere	P _t W	75	80	90	95	90
turatie	n 1/min	2740	2670	2540	2490	2550
put. fonica aspiratie	L _{WA2} dB (A)	-	72	71	74	76
put. fonica refulare	L _{WA2} dB (A)	-	70	70	73	74
put. fonica radiatie	L _{WA2} dB (A)	-	58	57	58	59
Tensiunea	U _N	230V ~		reglaj turatie		V
curent	I _N	0,4 A		protectie motor		TAI
curent	I _{max}	0,5 A		condensator		2,5 μF / 450 V
temperatura ambianta	t _a	30 °C		clasa de izolare		F
temperatura medie	t _p	30 °C		numarul de poli		2
				greutate		4,15 kg

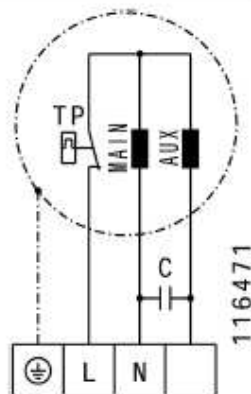

accesorii pentru RS 160L

pentru mai multe informatii vezi internet

- MTY 1
regulator electronic
continuu
- ETY 15
regulator electronic
continuu
- TEE 015
transformator in 5 trepte
fara protectie motor
- TEE 0145
transformator 7 trepte
fara protectie motor
- OS 01
comutator
- MRS 2
consola de montaj
pentru ventilatoare pt tubulatura RS
- VM 160
manecuta de legatura
pentru reducerea zgomotului si vibratiilor
- RSK 160
clapeta anti-retur
- RSK 160D
clapeta anti-retur
cu brata
- SG 160 01
grilaj de protectie
- SDS 160
atenuator de zgomot rigid
- SDF 160
atenuator de zgomot flexibil