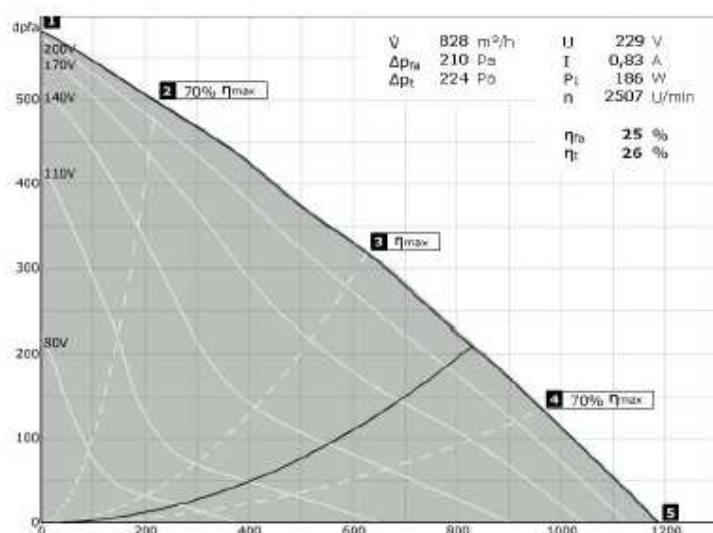


RS 250L

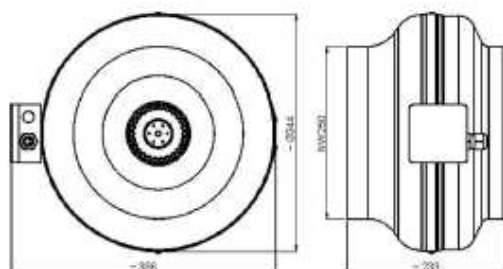
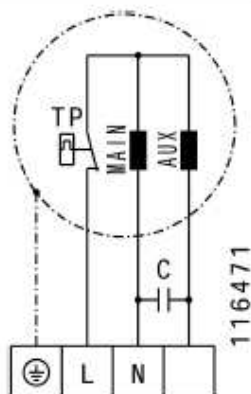
104222


ruck
 VENTILATOREN


- ventilator centrifugal cu palete orientate inapoi
- carcasa metal RAL 7035
- turatie reglabila
- termosta contact integrat

230V 50Hz

punct de functionare		1	2	3	4	5
current	I A	0.57	0.66	0.84	0.80	0.71
consum de putere	P _t W	115	145	190	180	160
turatie	n 1/min	2540	2720	2510	2560	2660
put. fonica aspiratie	L _{WA5} dB (A)	-	71	69	71	-
put. fonica refulare	L _{WA6} dB (A)	-	72	71	73	-
put. fonica radiatie	L _{WA2} dB (A)	-	56	56	58	-
Tensiunea	U _N	230V ~		reglaj turatie		V
current	I _N	0.8 A		protectie motor		TAI
current	I _{max}	0.9 A		condensator		5 μF / 400 V
temperatura ambianta	t _a	60 °C		clasa de izolare		F
temperatura medie	t _e	60 °C		numarul de poli		2
				greutate		4,96 kg


accesorii pentru RS 250L
 pentru mai multe informatii vezi internet

- MTY 1 regulator electronic continuu
- ETY 15 regulator electronic continuu
- TEE 015 transformator in 5 trepte fara protectie motor
- TES 0145 transformator 7 trepte fara protectie motor
- GS 01 comutator
- MRS 2 consola de montaj pentru ventilator si tubulatura RS
- VM 250 manivela de legatura pentru reducarea zgomotului si vibratiilor
- RSK 250 clapeta anti-retur
- RSK 250D clapeta anti-retur cu brate
- SG 250 01 grilaj de protectie
- SDS 250 atenuator de zgomot rigid
- EDF 250 atenuator de zgomot flexibil