


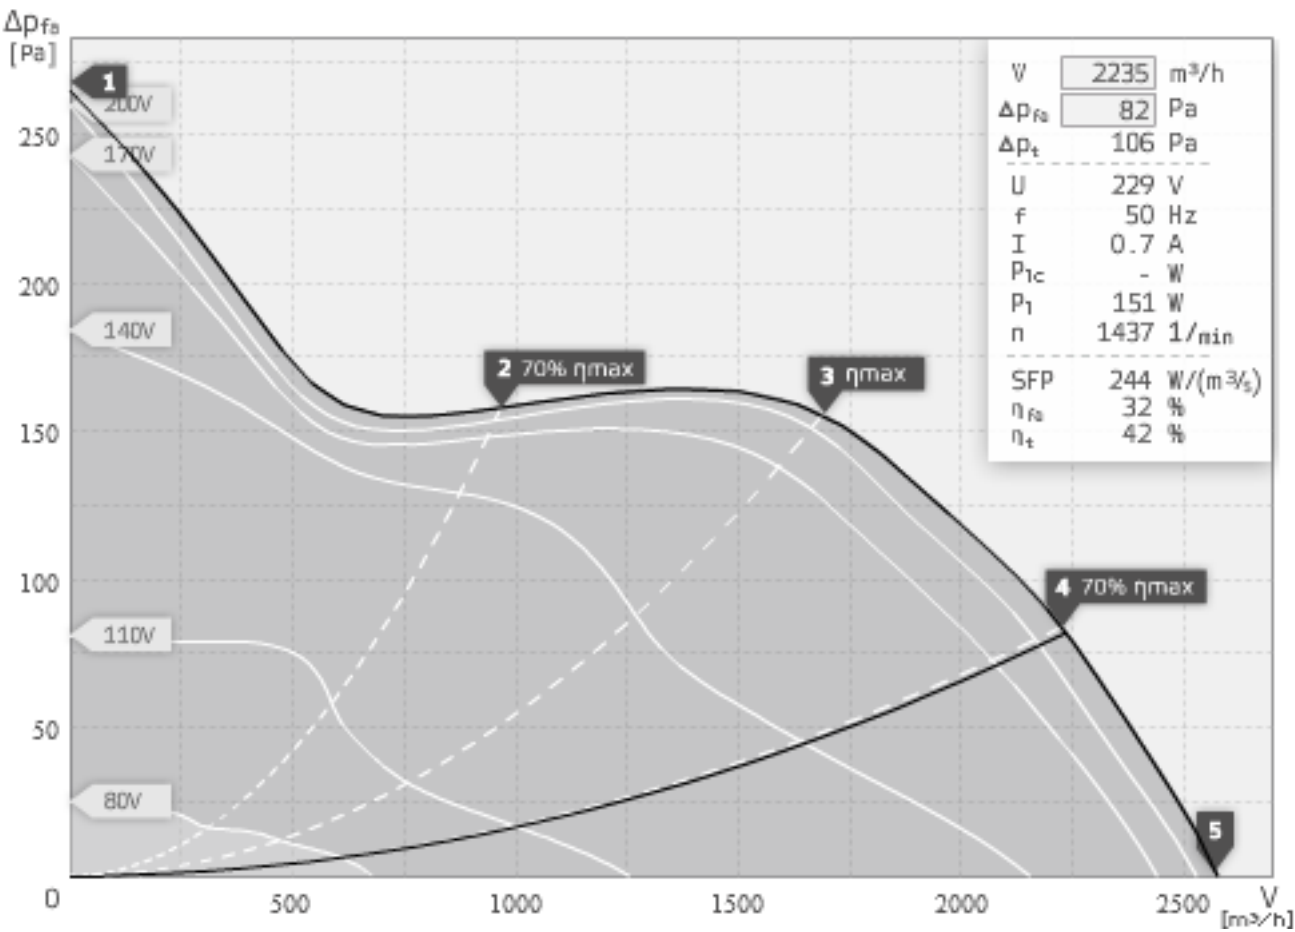

- ventilator diagonal cu stator
- carcasa metalica tabla zincata
- turatie reglabila
- termocontact integrat
- include consola de montaj

punct de functionare		1	2	3	4	5
curent I	A	0,6	0,6	0,7	0,7	0,6
consum de putere P1	W	142	126	150	151	140
turatie n	1/min	1441	1455	1438	1437	1447
put. fonica aspiratie LWA5	dB(A)	72	68	64	66	69
put. fonica refulare LWA6	dB(A)	76	70	67	69	71
put. fonica radiatie LWA2	dB(A)	55	51	48	49	52

putere fonica (LW) dB(A)		banda frecventa medie								
		Σ	63	125	250	500	1k	2k	4k	8k
aspiratie	LWA5	65	-	46	56	59	60	59	59	46
refulare	LWA6	69	-	57	57	64	65	60	57	43
Radiatie	LWA2	49	-	41	39	40	43	40	42	25

EL 355 E4 01 112369	
tensiunea UN	230 V 1~
curent Imax	1
temperatura ambianta tA	80 °C
temperatura medie tM	80 °C
reglaj turatie	V
protectie motor	TMI
clasa de izolare	F
greutate	13,5 kg

