


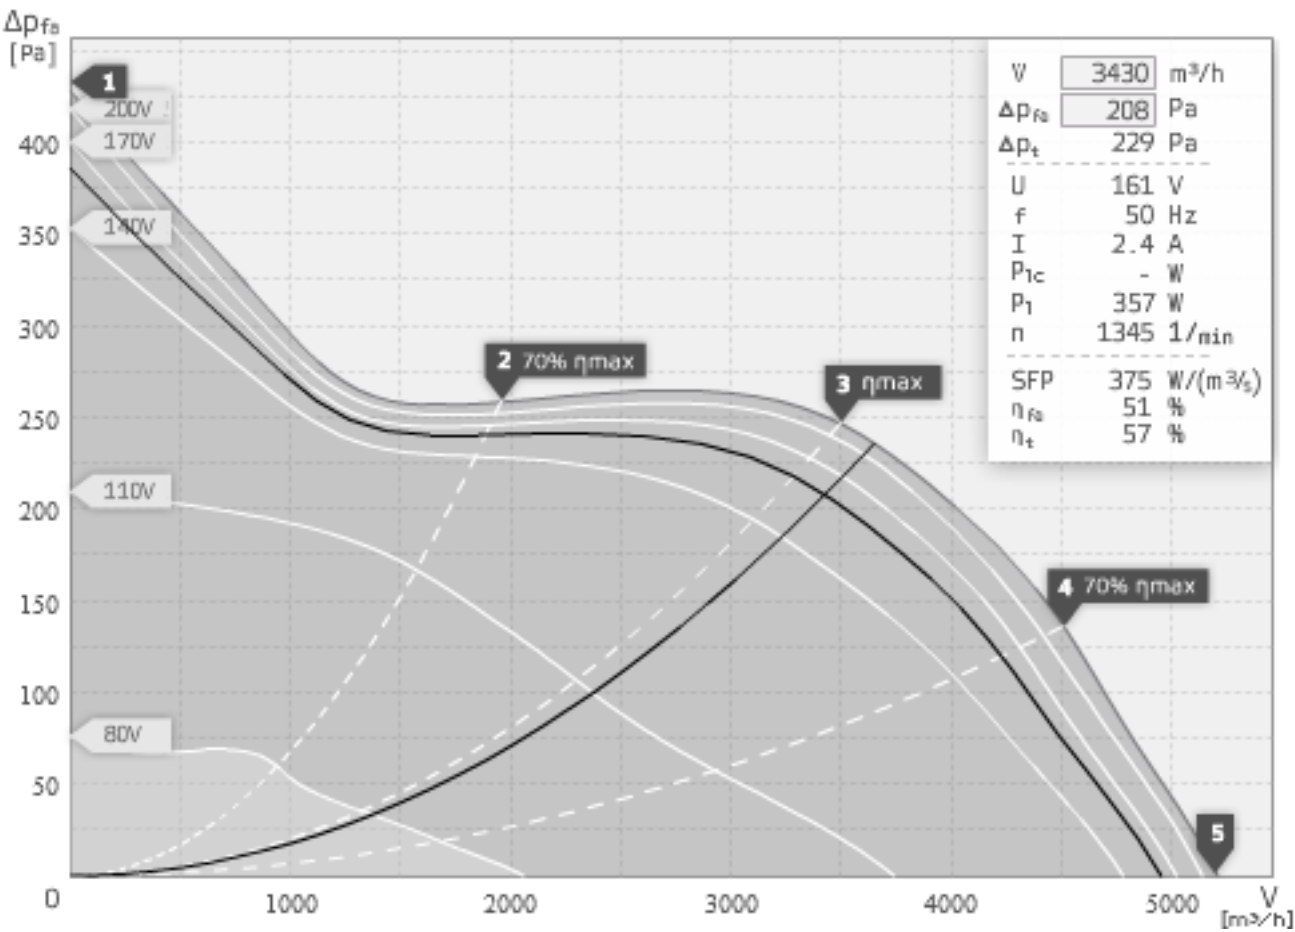

- ventilator diagonal cu stator
- carcasa din aluminiu
- turatie reglabila
- termocontact integrat
- include consola de montaj

punct de functionare		1	2	3	4	5
curent I	A	2,2	2,1	2,3	2,4	2,2
consum de putere P1	W	417	374	445	449	411
turatia n	1/min	1435	1450	1435	1435	1445
put. fonica aspiratie LWA5	dB(A)	81	70	72	76	78
put. fonica refulare LWA6	dB(A)	85	80	77	79	82
put. fonica radiatie LWA2	dB(A)	74	70	66	70	72

putere fonica (LW) dB(A)		banda frecventa medie								
		Σ	63	125	250	500	1k	2k	4k	8k
aspiratie	LWA5	70	-	52	58	63	66	66	58	49
refulare	LWA6	74	-	61	61	70	71	66	60	50
Radiatie	LWA2	63	-	43	53	60	60	53	49	36

EL 450 E4 01 119336	
tensiunea UN	230 V 1~
curent Imax	3,1
temperatura ambianta tA	80 °C
temperatura medie tM	80 °C
reglaj turatie	V
protectie motor	TAO
clasa de izolare	F
greutate	18,4 kg

