

PUNTO FOUR

NEW





AXIAL FANS WITH STYLISH FRONT PANEL

Range and products specifications:


- 4 models available, with or without timer:
MFO 100 (diam. 100 mm)
MFO 100 T (diam. 100 mm)
MFO 120 (diam. 120 mm)
MFO 120 T (diam. 120 mm)
- Body made of ABS plastic anti-UV
- Integral backdraught shutter
- Timer models adjustable between 3 and 20 minutes.
- Standard models can be speed regulated.
- Electric supply 230V/50Hz
- Protection: IPX4
- Insulation class: Cl. II

KEY FEATURES

- Stylish front panel to complement interior design
- Easy to clean and to maintain
- Reliable
- Safety IMQ Third Party certified
- Performances and noise emissions
IMQ PERFORMANCE Third Party certified

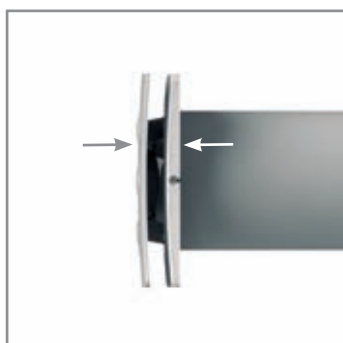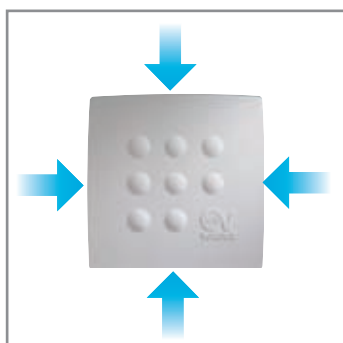

DIMENSIONS

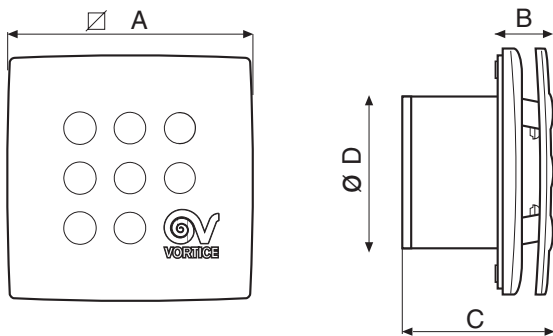

Models	Code	∅ A	B	C	∅ D	Kg
MFO 100/4"	11145	158	37	97	98.4	0.52
MFO 100/4" T	11146	158	37	97	98.4	0.52
MFO 120/5"	11147	178	42.3	114	118.9	0.70
MFO 120/5" T	11148	178	42.3	114	118.9	0.70

TECHNICAL DATA

MODELS	Code	AIRFLOW		PRESSURE		POWER	SOUND PRESSURE	MAX TEMPERATURE
		m ³ /h	l/s	mmH ₂ O	Pa			
MFO 100/4"	11145	85	24	3	29	15	33.1	50
MFO 100/4" T	11146	85	24	3	29	15	33.1	50
MFO 120/5"	11147	175	49	5	49	20	39.1	50
MFO 120/5" T	11148	175	49	5	49	20	39.1	50

